

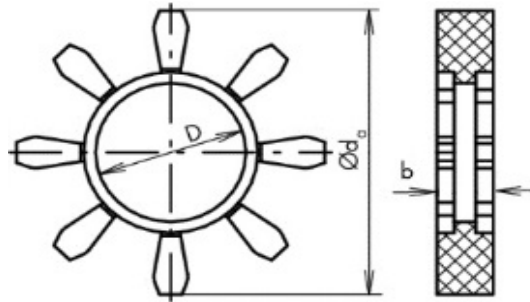

TENGELYKAPCSOLÓK / COUPLINGS / SPOJKY


Gumi / rubber / guma:

PUR

Keménység / hardness / tvrdost' :

92 Shore-A

Működési hőmérséklet / admissible temperature
pracovní teplota: -30 +80 °C

Típus	d	D	Z	b	Átv.nyomaték Troque Pre. Moment (Nm)
Bipex 43	43	21	8	9	13,5
Bipex 53	53	26	8	10	24
Bipex 62	62	30	8	12	42
Bipex 72	72	36	8	14	75
Bipex 84	84	41	8	16	130
Bipex 97	97	50	8	19	220
Bipex 112	112	54	8	22	360
Bipex 127	127	62	12	22	550