




# CATENE A RULLI CON PERNI SPORGENTI - DIN 8187 - ISO 606

## EXTENDED PIN CHAINS - DIN 8187 - ISO 606

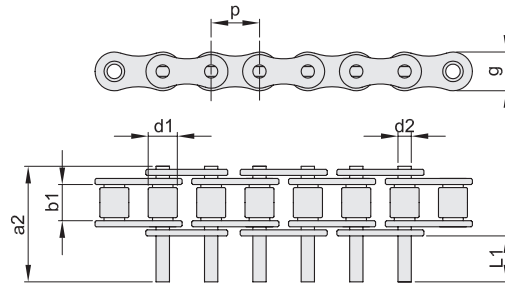

**CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001/2000 - ISO 14001 E API 7F**  
**CHAIN PRODUCED BY ISO 9001/2000 - ISO 14001 AND API 7F CERTIFIED COMPANY**



**CATENA PRESTIRATA / PRE-STRETCHED CHAINS**

ISO	p		b <sub>1</sub> mm min.	d <sub>2</sub> mm	d <sub>1</sub> mm max.	L <sub>1</sub> mm	a <sub>2</sub> mm max.	g mm max.	Carico di rottura		q kg/m ≈
	mm	inch							minimo KN	medio KN	
<b>06B-1</b>	9,525	3/8"	5,72	3,28	6,35	11,10	22,75	8,26	9,0	10,7	0,47
<b>08B-1</b>	12,7	1/2"	7,75	4,45	8,51	15,15	30,91	11,81	18,0	21,1	0,75
<b>10B-1</b>	15,875	5/8"	9,65	5,08	10,16	17,63	35,26	14,73	22,4	27,4	1,07
<b>12B-1</b>	19,05	3/4"	11,68	5,72	12,07	20,83	41,66	16,13	29,0	32,3	1,22
<b>16B-1</b>	25,4	1"	17,02	8,28	15,88	33,80	67,58	21,08	60,0	70,6	3,03