






FLEX-P SPOJKY

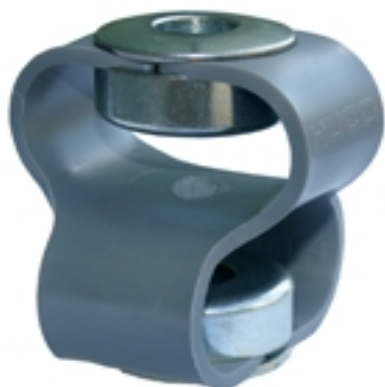

Typ 10

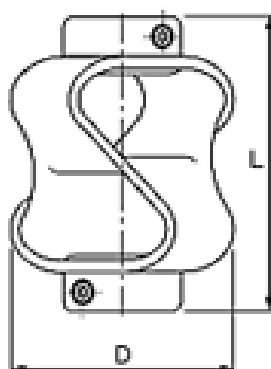

Typy 20, 30, 40

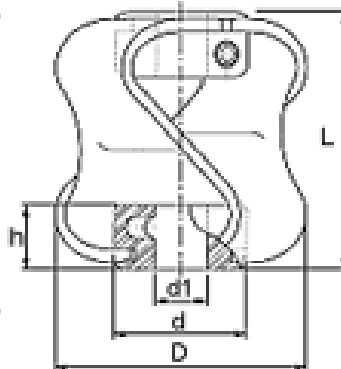

Typ	Kód	Max Ø. D	Max otvor d1	Dĺžka L	Výška náboja h	Skrutka			Hmotnosť kg x 10 ⁻³
						Rozmer	Moment Nm	Kľúč mm	
10	047.10	27	9.53	27	7.90	M3	0.94	1.5	25
20	047.20	48	12.7	48	12.70	M4	2.27	2	92
30	047.30	54	16	55	16.0	M5	4.62	2.5	124
40	047.40	56	16	56	16	M6	7.61	3	136

Materiál spojky:

Náboj: Oceľ 230M07 Pb so zinkovým povlakom

Flexibilný element: HYRTEL®.

Tepelná odolnosť spojky:

-40°C to +100°C

Vlastnosti:

Typ	Kód	Max moment (1)	Max moment (2)	Maximálne vyrovnanie / posunutie		
				Uhol	Radial	Axial
		Nm	Nm	deg	mm	mm
10	047.10	0.5	0.8	10	2.6	4.5
20	047.20	1.8	3	15	3.2	7.5
30	047.30	5	8	15	3.2	8.5
40	047.40	10	18	15	3.2	11

Maximálna rýchlosť otáčok: 3000 1/min